

Product: Combined range

Producer: **Gastro-Haal, s.r.o.**

Type: **SPE-740 C**Country of origin: **SR**

.01000 **Q**000000 **Q**000000 Q0000 Q0000

Purpose

The combined range with static and circulation oven is used for large capacity cooking and baking. It is designed for food establishments such as school canteens, restaurants, hospitals, factory, catering, military units and others.

Features of SPE-740 C:

Upper part cooker with gas burners for cooking

- 4 powerful gas burners

Lower part: static / hot air oven for baking

- -3 inserts
- material inside the oven is stainless steel
- power supply: electricity
- upper and lower heating element
- temperature regulation in the oven from 50 ° C to 320 ° C
- separately controllable fan, sound signaling

Construction:

- self-supporting massive and solid construction
- rounded edges without dangerous corners and protrusions
- slope design of the chimney on the top plate for safety
- removable chimney in the back of device
- adjustable feet
- simple operation, low consumption and low operating costs

Standard accessories included in the price

- grid for smaller pots

Optional accessories for an

additional fee

SPE-740 C

- stainless steel grate
- enamel baking pans











Technical descriptions


Line	700
Туре	SPE-740 C
Description	combined range
External dimensions (mm)	800x700x900 mm
Gas burners (pc)	4 pc
Type of oven	circular
Heating	
Gas connection (")	1/2"
Input of burners (kW)	2x3,7/2x4,8
Input of oven (kW)	4,1kW
Input in total (kW)	17
Nominal current (A)	10
Nominal voltage (V)	3 N - 400V, 50Hz
Nominal gas pressure (G-20) kPa	2
Nominal gas pressure G31-propan-I3P (kPa)	3,7
Gas consumption G20-I2H (m³/h)	1,7
Gas consumption G31 propane - I3P (m³/h)	0,66
Gas consumption G31 propane - I3P (kg/hod)	1,33
Thermostat range (°C)	50-280°C
Possible cooking temperature (°C)	50-300°C
Protection	
Index of protection	IP 41
Construction, savings, safety	
Inserts in oven (pc)	3 pc
Sound signaling	no
Rounded edges without danger corners and protrusions	yes
Adjustable feet	yes
Weight (kg)	85 kg
Options for extra fees according of valid Price list	
Enameled trays	yes (extra fee)
Stainless steel rack	yes (extra fee)



Technical dimensions

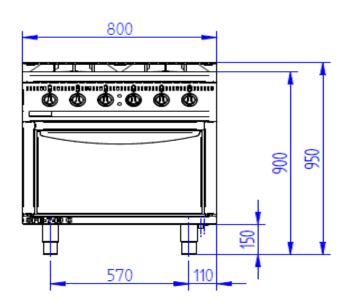





SPE-740 C		
Ε	Electric connection	
G	Gas connection G3/4	