

TECHNICAL DATA SHEET

Equipment:	Electric tilting bratt pan 50 liters, stainless steel
Type:	P.PE-750
Product line:	Practic
Manufacturer:	Gastro-Haal, s.r.o.
Country of origin:	Slovakia



Usage

The electric tilting frying pan is designed for large-capacity thermal food preparation by frying in oil or stewing in water (in its own juices). This equipment is most commonly used in large-scale catering operations such as school canteens, restaurants, hospitals, and similar facilities.

Practic

TOP attributes of Gastro-Haal tilting bratt pans from the Practic product line are:

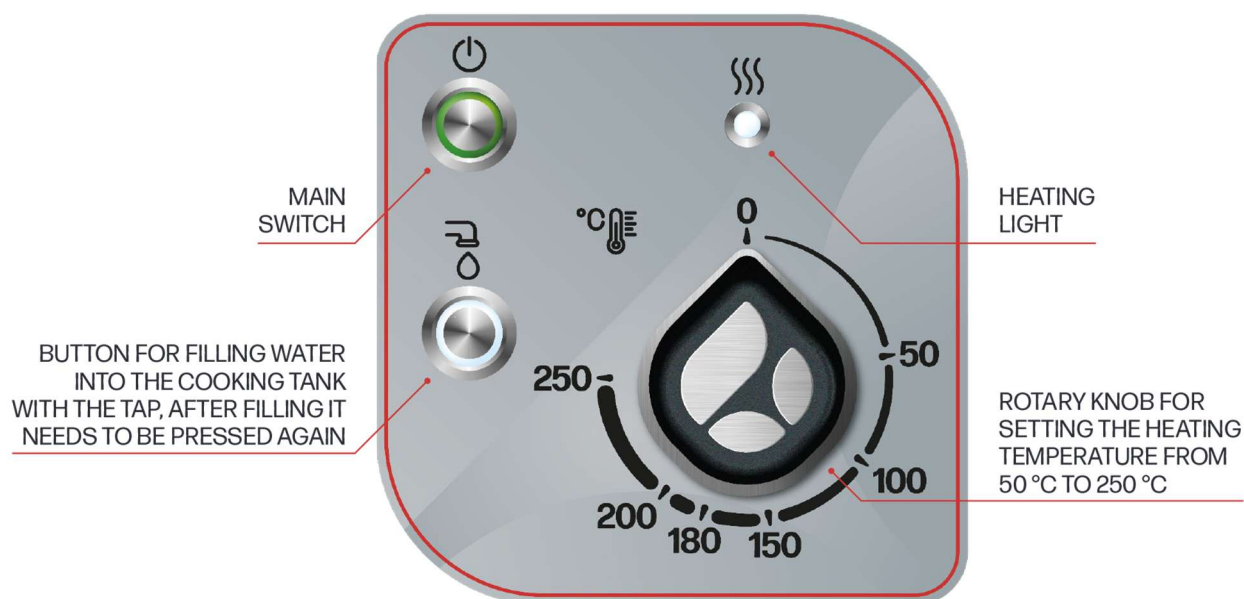
- ✓ **Fast and even browning with a non-stick surface.**
- ✓ **Low energy consumption and low operating costs.**
- ✓ **Self-supporting, heavy-duty, and robust construction ensuring long service life.**
- ✓ **Durable metal control knobs with safety features providing IP65-rated water resistance.**
- ✓ **Available in stainless steel or cast iron variants.**

ELECTRIC TILTING BRATT PAN CONTROLS

- **main power switch, heating indicator light, on/off switch for water supply from the faucet to the pan container**
- **main rotary control for setting the frying/stewing temperature in the range from 50°C to 250°C**

Heating power

in range **from 50°C to 250°C**

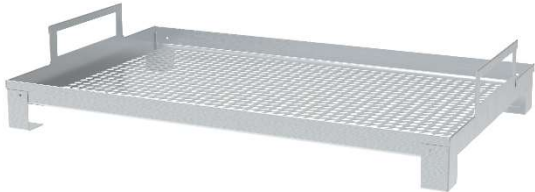
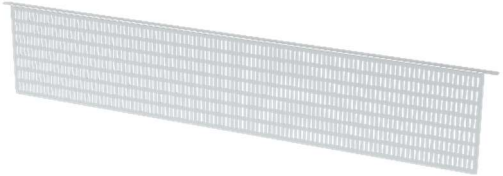


TECHNICAL DESCRIPTIONS

Line	700
Type	P.PE-750
Product line	Practic
Equipment	electric tilting bratt pan
Control panel	classic analogy
Material of bottom cooking tank	stainless steel
Cooking pan bottom thickness	8 mm
External dimensions (mm) wxdxh	800x700x900 mm
Dimensions of the cooking tank (mm) wxdxh	700x435x160 mm
Volume of the cooking tank (l)	50,1l
Volume up to the spout on cooking tank (l)	42,6 l
Usable volume of the cooking tank (max. line) (l)	37,4 l
Weight (kg)	125 kg
Heating	
Heating elements (pcs)	6 pcs
Nominal el. input (kW)	9 kW
Nominal voltage (V)	3 N - 50 Hz / 400V TN-S
Nominal current (A)	13,5 A
Thermostat range (°C)	50 - 250 °C
Possible cooking temperature (°C)	50 - 250 °C
Water, protection	
Cold water connection (")	3/4"
Index of protection	IP 41
Index IP control elements	IP 65
Automatic water filling with tap using a button	yes
Construction, savings, safety	
Tap for cold water	yes
Double insulation on cables and wires (silicone protection)	yes
Rounded edges without danger corners and protrusions	yes
Adjustable feet	yes
Options for extra fees according of valid Price list	
Square steamer	yes (extra fee)
Strainer for the pan outlet	yes (extra fee)

ACCESSORIES

Accessories available for an **extra charge** according to the price list

Square steamer 1-1 P.P_GN1/1 1x1 steamer 100x352x554mm	
Strainer for straining 1-1 C.P_50 1x1 strainer 156x720x20 mm	
Electric lifting trolley AZV 2/1GN 1005x630x1100 (1310) mm AZV 1/1GN 670x630x1160 (1370) mm Adjustable and automatic lifting trolleys for handling and transporting food.	

TECHNICAL DIMENSIONS

