TECHNICAL DATA SHEET

Equipment:	**Electric range**
Type:	**P.SE-740 AC**
Product line:	**Practic**
Manufacturer:	**Gastro-Haal, s.r.o.**
Country of origin:	**Slovakia**



Usage

The electric stove with a convection oven is designed for large-capacity cooking and baking. This equipment is most commonly used in large-scale catering operations such as school canteens, restaurants, hospitals, and similar facilities.

GASTRO – HAAL, s.r.o. Považská 16, 940 67 Nové Zámky +421 35 6 430 115 gastro@gastrohaal.sk
Company ID: 31435076 VAT ID: 2020413659 VAT ID: SK2020413659 www.gastrohaal.sk/en

Practic

TOP attributes of Gastro-Haal electric ranges from the Practic product line are:

- ✓ **Large cooking surface, suitable for both small and large pot and pan volumes**
- ✓ High performance, easy operation, and low energy consumption
- ✓ **Self-supporting, heavy-duty, and robust construction with long service life**
- ✓ Durable metal control knobs with safety features providing IP65-rated water resistance
- ✓ **The oven preserves authentic, traditional flavours during baking**


ELECTRIC RANGE CONTROLS

A. Plate control on the electric range – Line 700

- **Main rotary knob for setting heating power, indicator light signalling active heating process**


6 levels of heating power


0 – Without heating / In the range = **1 - 6**

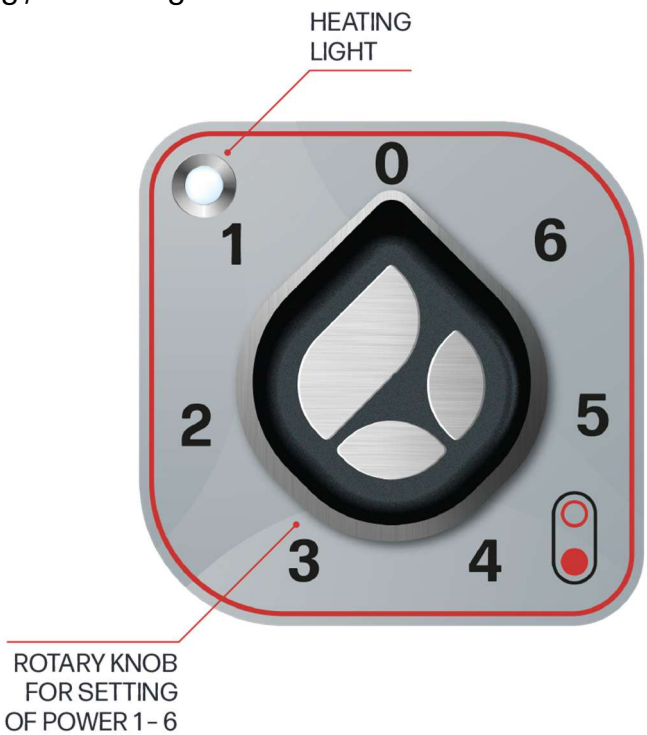

B. Oven activation and temperature setting – line 700

- **Rotary knob for setting baking temperature in the range of 50 °C to 300 °C, with indicator light signalling heating progress**
- **Rotary knob for switching on the oven and fan, with indicator light indicating that the device is powered on**

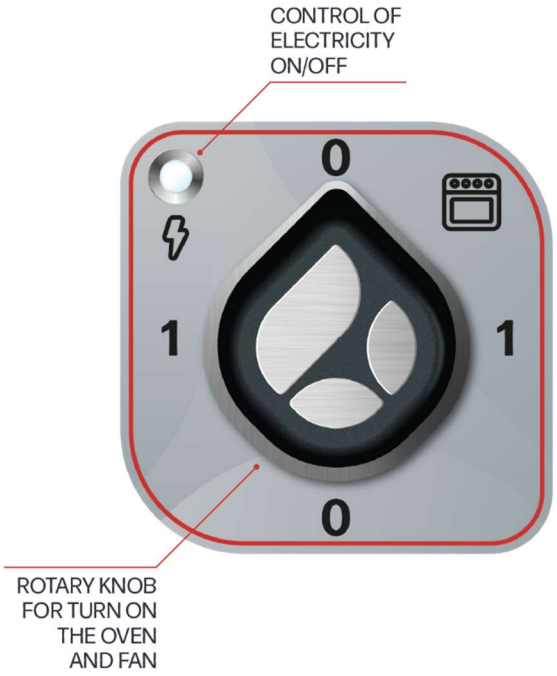

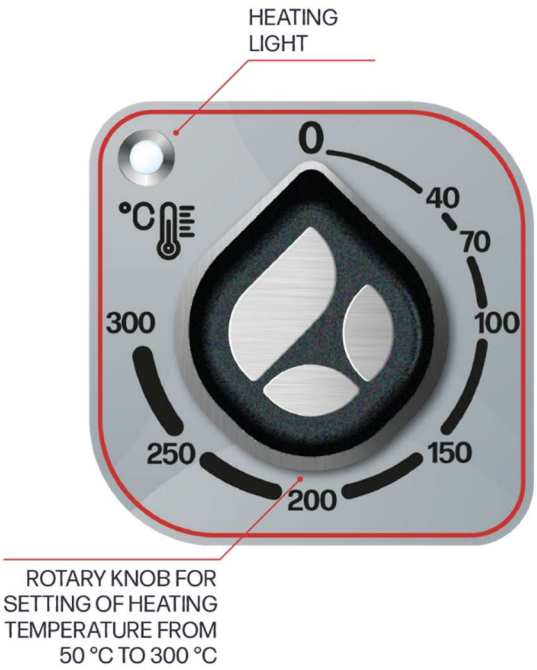

TECHNICAL DESCRIPTIONS


Line	700
Type	**P.SE-740 AC**
Product line	**Practic**
Equipment	electric range
External dimensions (mm) wxdxh	800x700x900 mm
Electric plates (pcs)	4 round (Ø 220 mm)
Type of oven	convection
Weight (kg)	80 kg
Heating	
Electric plates input (kW)	4x2,6 kW
Input electric oven (kW)	4,1 kW
Total input (kW)	14,5 kW
Nominal voltage (V)	3 N - 400V, 50Hz
Nominal current (A)	30 A
Thermostat range (°C)	50 - 280 °C
Possible cooking temperature (°C)	50 - 300 °C
Enamelled sheet dimensions	GN 1/1
Protection	
Index IP	IP 41
Index IP of control elements	IP 65
Construction, savings, safety	
Inserts in oven (pcs)	3
Sound signalisation	no
Rounded edges without danger corners and protrusions	yes
Adjustable feet	yes
Options for extra fees according of valid price list	
Enamelled baking trays	yes (extra fee)
Stainless steel racks	yes (extra fee)


ACCESSORIES


Accessories available for an extra charge according to the price list

Rack **RP-700** Stainless steel rack GN 1/1 - for 700 ranges	
Baking trays **P-700-S-20** Enamelled baking tray GN 1/1 – for 700 ranges, 20 mm **P-700-S-40** Enamelled baking tray GN 1/1 - for 700 ranges, 40 mm **P-700-S-65** Enamelled baking tray GN 1/1 - for 700 ranges 65 mm	

TECHNICAL DIMENSIONS

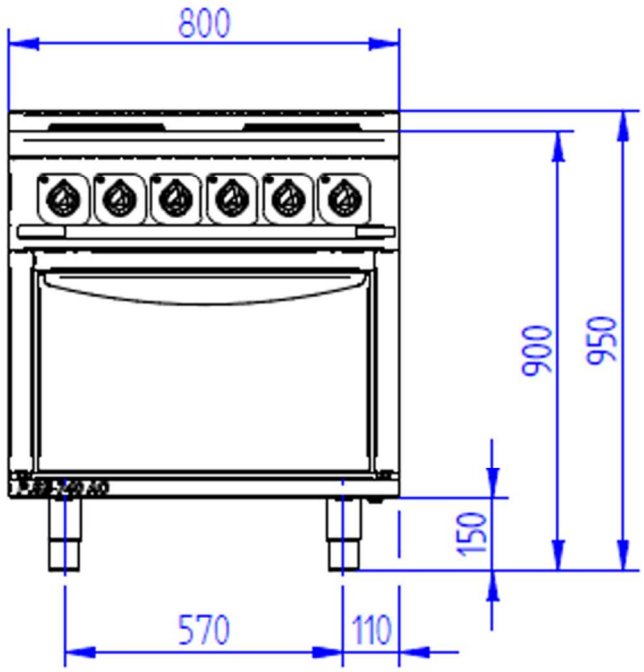

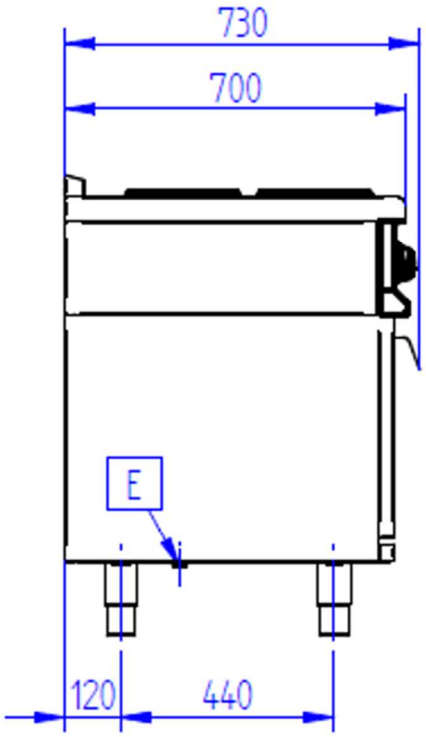

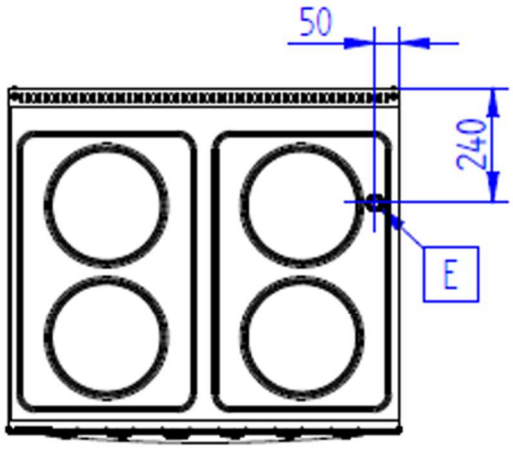

P.SE-740 AC	
E	Electric connection