

Product: **Potato peeler**

Manufacturer: **Gastro-Haal, s.r.o.**

Type: **SKZ-15** a **SKZ-25**

Country of origin: **SR**

Purpose

Potato peelers are used for large-scale potato cleaning. They are designed for catering operations such as school canteens, restaurants, hospitals, company catering, military units and others. Ensures efficient cleaning of potatoes with minimal waste.

Potato peelers have features such as:

- **Model SKZ-15** = min. 8kg / opt. 2kg / max. 15kg potatoes
- Cleans 200-400kg of potatoes per hour
- **Model SKZ-25** = min. 20kg / opt. 25kg / max. 30kg potatoes
- Cleans 400-600kg of potatoes per hour
- **The all-stainless steel material** ensures high rust resistance and a long service life.
- Peeled potatoes in 1.5-2min
- **Carborundum on the sides and on the cleaning disc** at the bottom
- 3x more used carborundum material
- **Rinse function under the cleaning disc**



SKZ-15



SKZ-25

Waste catcher LO-1

It is an additional accessory for an additional fee. The waste trap separates the peels and dirt from the water, thus separating the waste and not letting large particles into the waste channel. You can choose between two sizes: LO-1 and LO-V.



Rinse Function Under the Cleaning Disc

The peeler is equipped with **two valves**. One valve supplies water into the peeling chamber, where the potatoes are being cleaned. The second valve directs water into the area beneath the cleaning disc - the section where dirt and debris accumulate and which is normally inaccessible. No more residue and waste trapped under the cleaning disc. This ensures the peeler remains consistently clean and maintains the highest hygiene standards.



Carborundum on both the sides and the disc.

The disc has specially shaped dynamic lines.



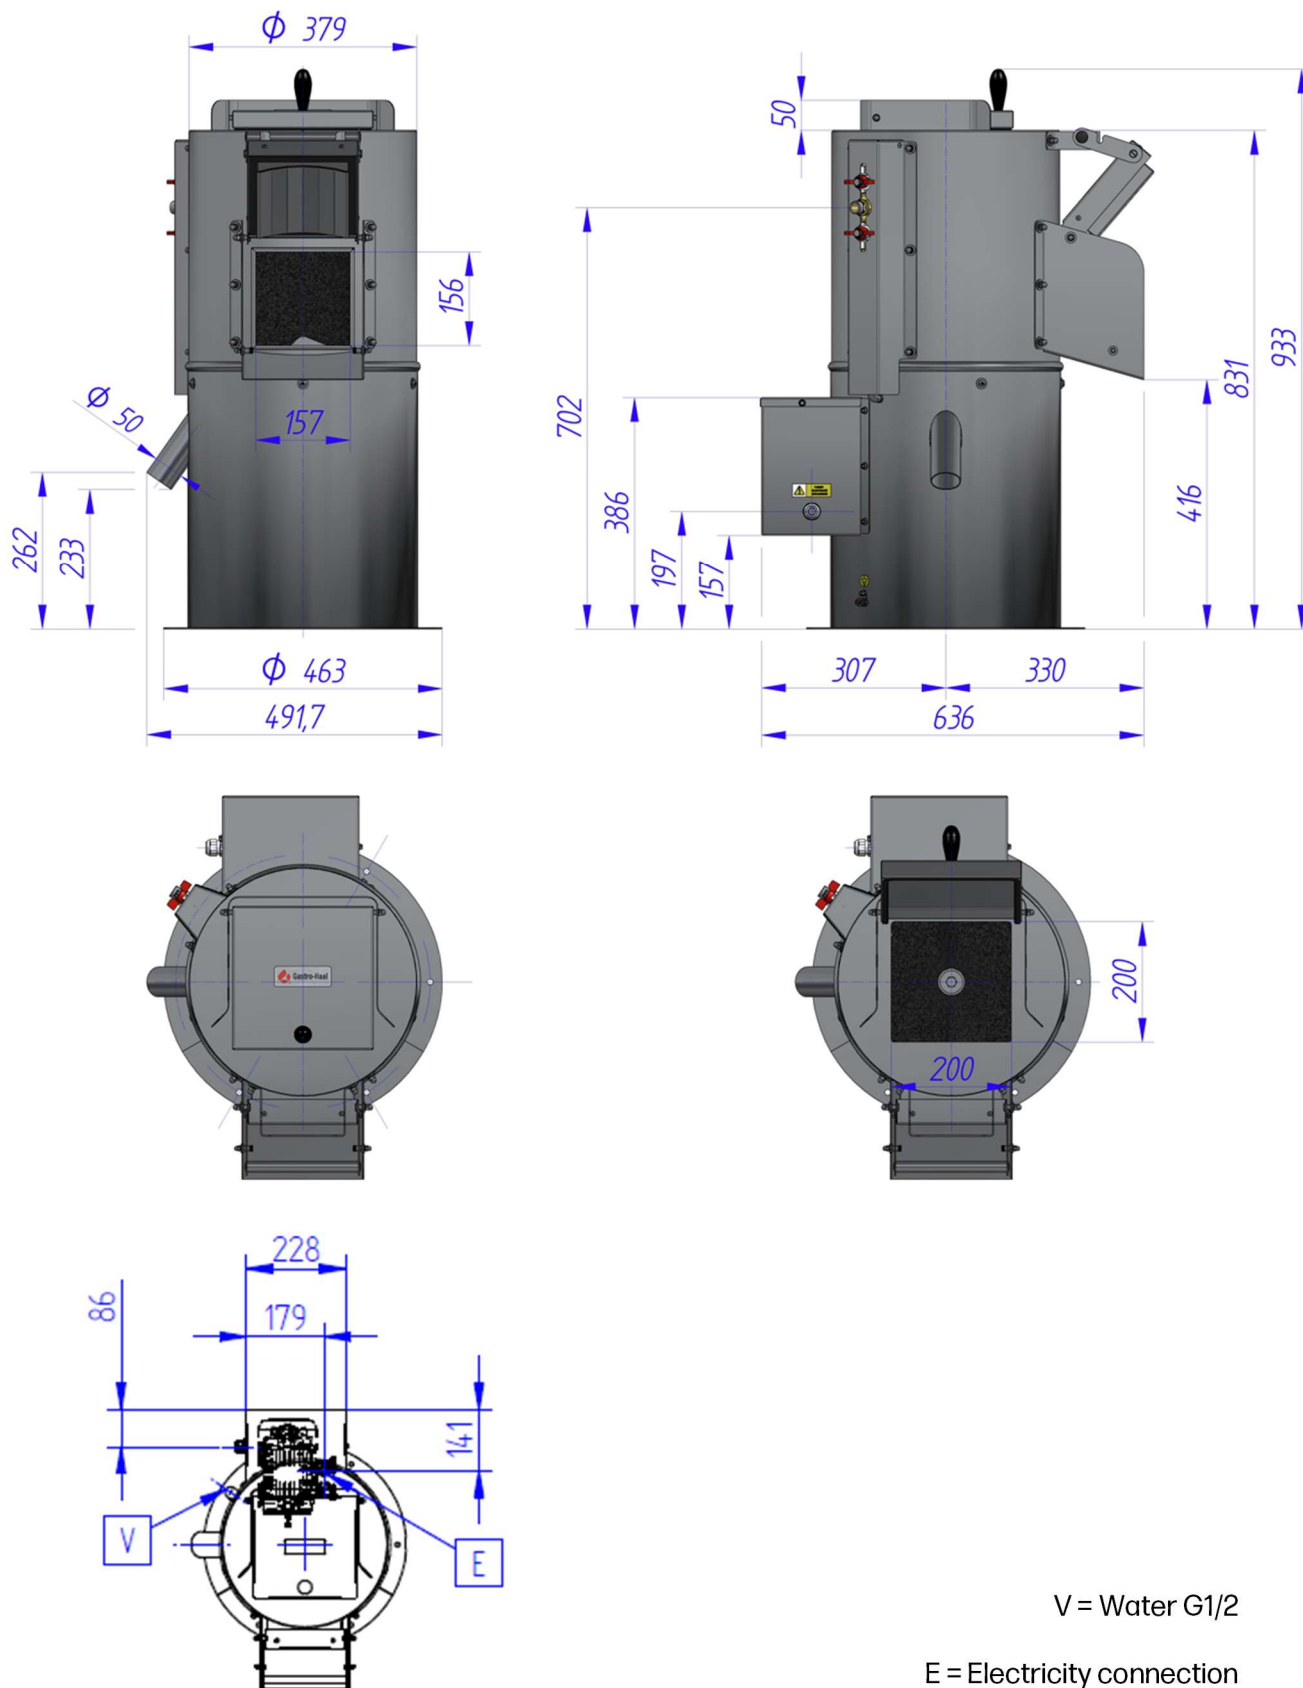
Safety grip

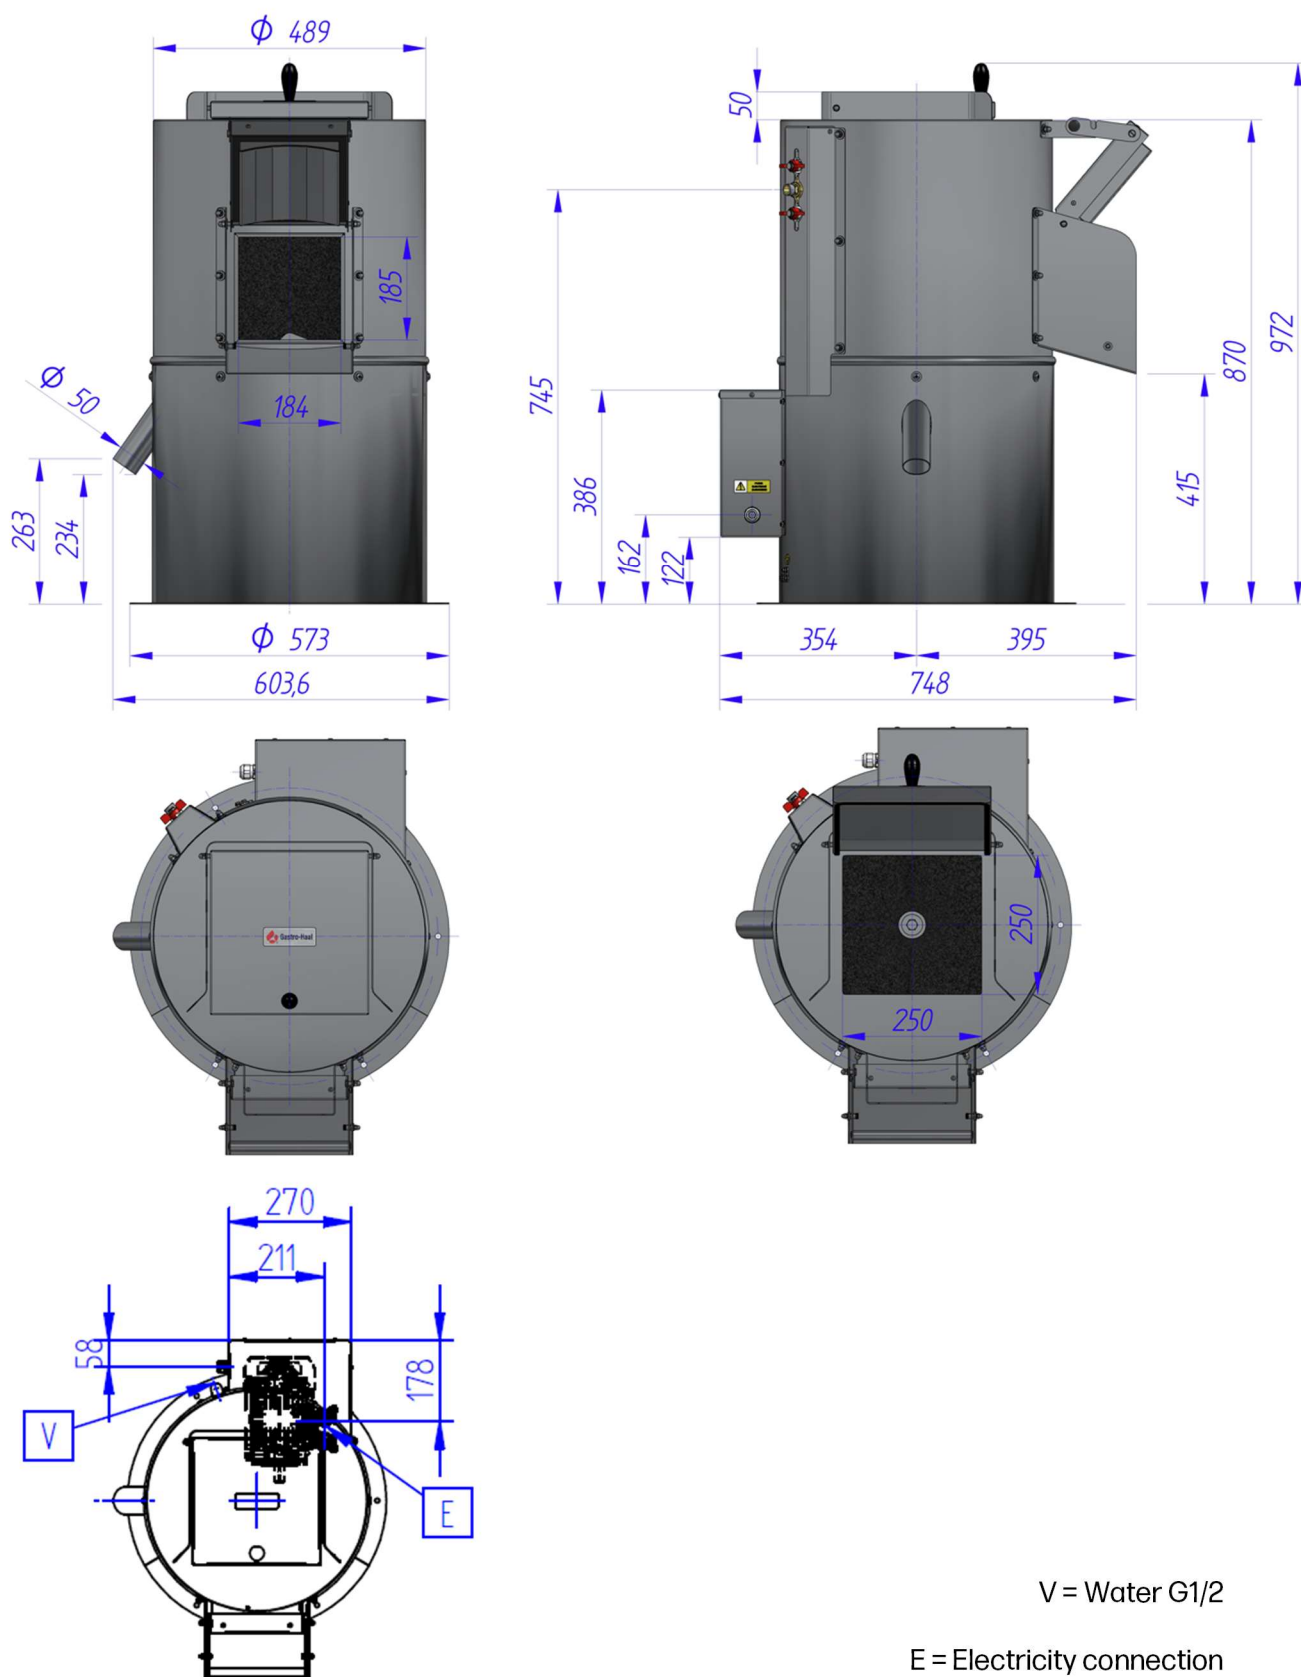
It ensures that the drain door does not fall off spontaneously during handling.

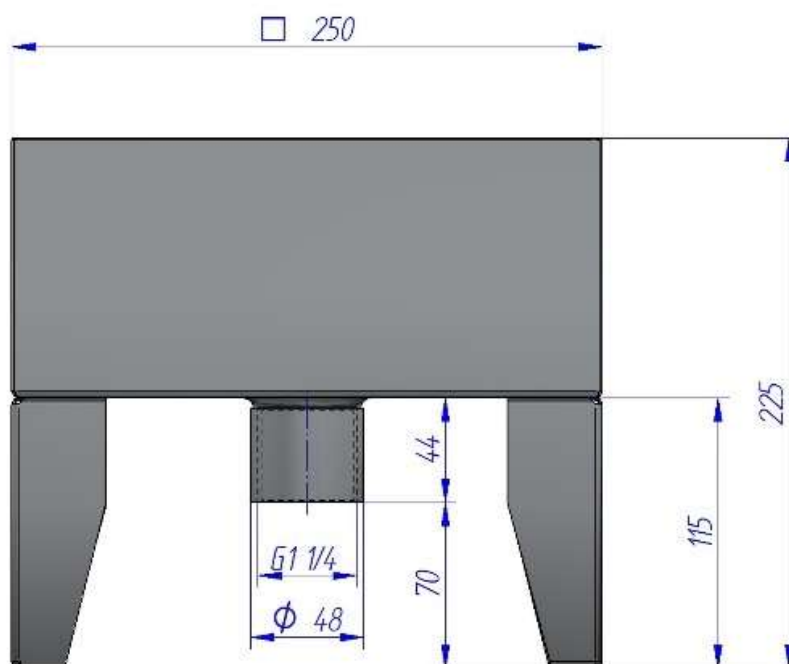
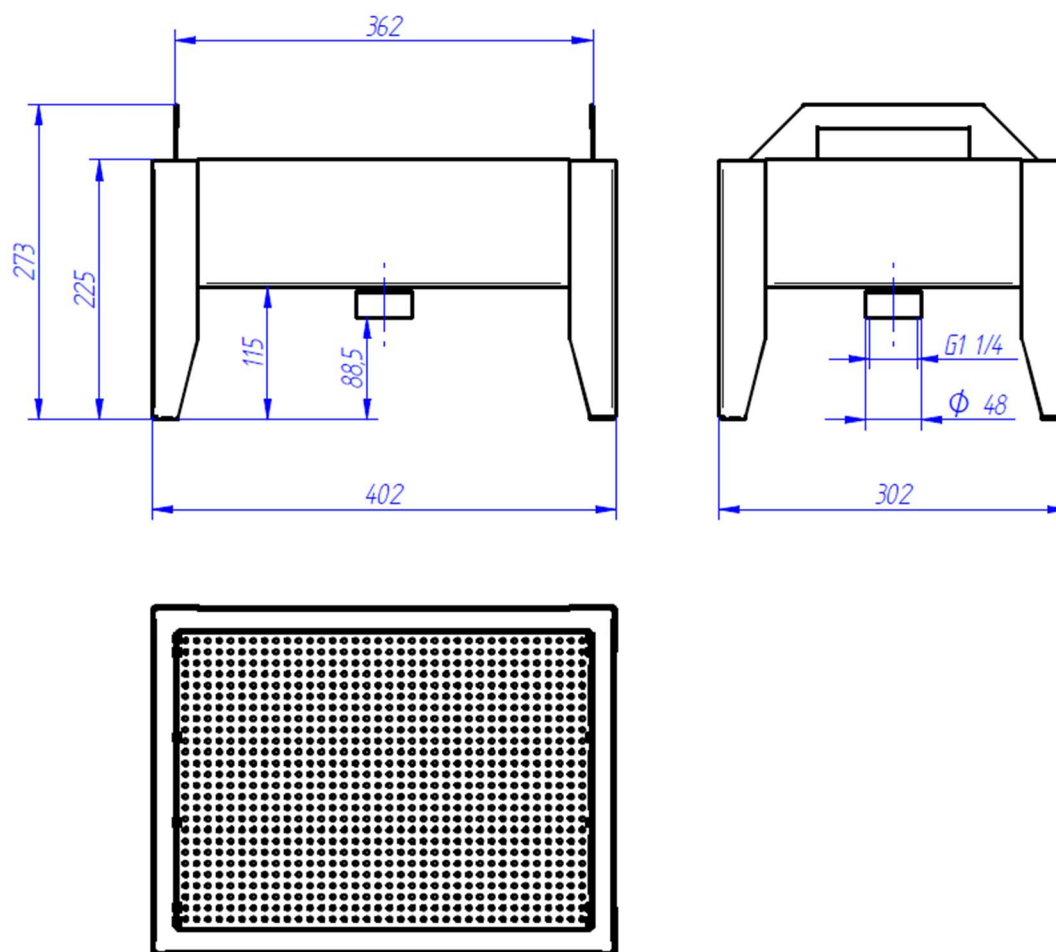


Technical parameters

Description	SKZ-15	SKZ-25
Device	Electric potato peeler	Electric potato peeler
External dimensions (mm)	493x638x901 mm	604x748x940 mm
Capacity (kg)	min. 8 kg / opt. 12 kg / max. 15 kg	min. 20 kg / opt. 25 kg / max. 30 kg
Weight (kg)	55 kg	80 kg
Connection, performance		
Nominal power (kW)	0,55 kW	0,75 kW
Nominal Voltage (V)	3 N - 400V, 50Hz	3 N - 400V, 50Hz
Nominal current (A)	1,5 A	2 A
Average cleaning performance (kg/hour)	200-400 kg/h	400-600 kg/h
One-cycle time (min)	1,5 - 2,0 min	1,5 - 2,0 min
Cleaning efficiency (%)	80%	80%
Sound pressure level (db)	less than 70 db empty use	less than 70 db empty use
Cover, water		
Cover IP	IP 54	IP 54
Water connection (")	1/2"	1/2"
Waste outlet (mm)	fi 50 mm external dimension	fi 50 mm external dimension
Max. water consumption	6 l/min	6 l/min
Construction, saving, safety		
External material	stainless steel	stainless steel
Internal sides of peeler	carborundum	carborundum
Bottom of peeler - cleaning disk	carborundum	carborundum
Cleaning the area under the cleaning disk	Yes	Yes
Optional accessories		
Waste catcher LO-1	Yes (extra fee)	
Waste catcher LO-1-V	Yes (extra fee)	
Timer ŠKZ-T	Yes (extra fee)	

Connection dimensions SKZ-15


Connection dimensions SKZ-25


Connection dimensions
LO-1

LO-1-V


ŠKZ-T
