

Type: SPE-960 NSC

Country of origin: SR

Product: Producer:

# Combined range Gastro-Haal, s.r.o.

### Purpose

The combined range with static and circulation oven is used for large capacity cooking and baking. It is designed for food establishments such as school canteens, restaurants, hospitals, factory, catering, military units and others.

### Features of SPE-960 NSC:

- **Upper part:** cooker with gas burners for cooking 6 powerful gas burners
- Lower part: static / hot air oven for baking
- 3 inserts
- material inside the oven is stainless steel
- power supply: electricity
- upper and lower heating element
- temperature regulation in the oven from 50  $^{\circ}$  C to 320  $^{\circ}$  C
- separately controllable fan, sound signaling
- -1 cabinet with storage space

#### **Construction:**

- self-supporting massive and solid construction
- rounded edges without dangerous corners and protrusions
- slope design of the chimney on the top plate for safety
- removable chimney in the back of device
- adjustable feet
- simple operation, low consumption and low operating costs

#### Standard accessories included in the price:

- grid for smaller pots

#### Optional accessories for an

additional fee:

- stainless steel grate
- enamel baking pans





GASTRO - HAAL, s.r.o. IČO: 31435076 Považská 16, 940 67 Nové Zámky +421 35 6 430 115 DIČ: 2020413659 IČ DPH: SK2020413659 gastro@gastrohaal.sk www.gastrohaal.sk






## **Technical descriptions**

Line	900
Туре	SPE-960 NSC
Description	combined range
External dimensions (mm)	1400x900x900 mm
Gas burners (pc)	6pc
Type of oven	static, hot air
Heating	
Gas connection (")	1/2"
Input of burners (kW)	3x3,7/2x4,8/1x7
Input of oven (kW)	4,1 kW
Input in total (kW)	27,7
Nominal current (A)	10
Nominal voltage (V)	3 N - 400V, 50Hz
Nominal gas pressure (G-20) kPa	2
Nominal gas pressure G31-propan-I3P (kPa)	3,7
Gas consumption G20-I2H (m³/h)	2,77
Gas consumption G31 propane - I3P (m³/h)	1,07
Gas consumption G31 propane - I3P (kg/hod)	2,17
Thermostat range (°C)	50-300 °C
Possible cooking temperature (°C)	50-320 °C
Protection	
Index of protection	IP 41
Construction, savings, safety	
Inserts in oven (pc)	Зрс
Sound signaling	yes
Rounded edges without danger corners and protrusions	yes
Adjustable feet	yes
Weight (kg)	150 kg
Options for extra fees according of valid Price list	
Enameled trays	yes (extra fee)
Stainless steel rack	yes (extra fee)
Grid for small pots (reduction on burner)	free of charge



## **Technical dimensions**

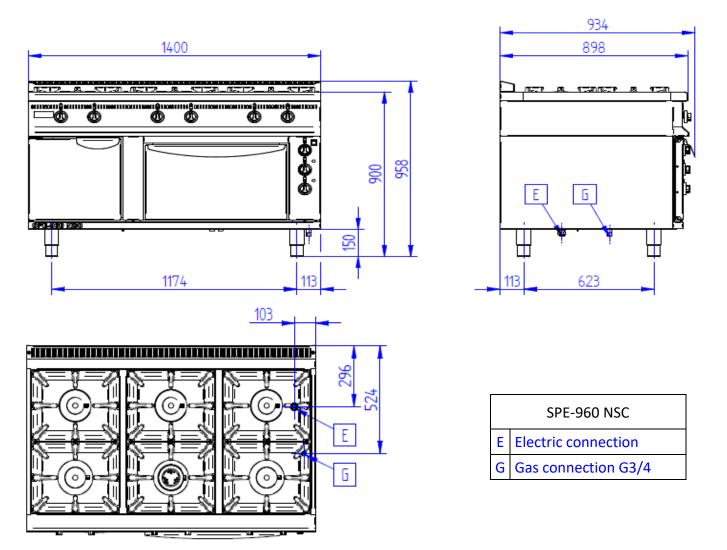

GASTRO - HAAL, s.r.o. IČO: 31435076 Považská 16, 940 67 Nové Zámky +421 35 6 430 115 DIČ: 2020413659 IČ DPH: SK2020413659 gastro@gastrohaal.sk www.gastrohaal.sk